

# SPECIFICATIONS KOZ CABLE BLOCK UNI 3x 13-32

- Application** : Suitable for fitting a number of single- and multiple-conductor low, medium and high voltage cables alongside or in layers upon each other.
- Range** : For cables with a nominal outer diameter from 13 up to 32 mm.
- Material** : Black polyamide, fibreglass-reinforced, virgin material. It is halogen-free and resistant to radioactive rays, UV rays, salt water, ozone, oils, acids, fuels and alkalis.
- Flame resistance** : UL94 V-0 and classification following DIN 5510-2:2009 with flammability class S3, smoke SR2 and dripping ST-2.
- Standards** : According to International Standard NEN-EN-IEC 61914:2016, Certificate of Conformity KOZ No 20117C by SGS.
- Flexure strength** : 210 N/mm<sup>2</sup>
- Tensile strength** : 120 N/mm<sup>2</sup>
- Thermal expansion** : 0,01% per 10°C temperature increase.
- Temperature limits** : Permanent application from -80°C to +120°C. Brief heating up to +220°C.
- Benefits** : The KOZ UNI blocks are designed in such a way that these blocks can be easily shortened as well as increased due to its unique dovetail construction. This has resulted in a cable block which can be used in a number of ways to suit your needs.




Initial torque for fastening fixing material : 5 – 8 Nm (depends on cable manufacturer's prescription).

Tests have been done by KEMA Netherlands, SGS Belgium, Underwriters Laboratories Inc. and Schneider France.

The product listed in this datasheet is manufactured in compliance with the latest EU Directive 2011/65/EU (RoHS) list.

Meeting all legal obligations under REACH.

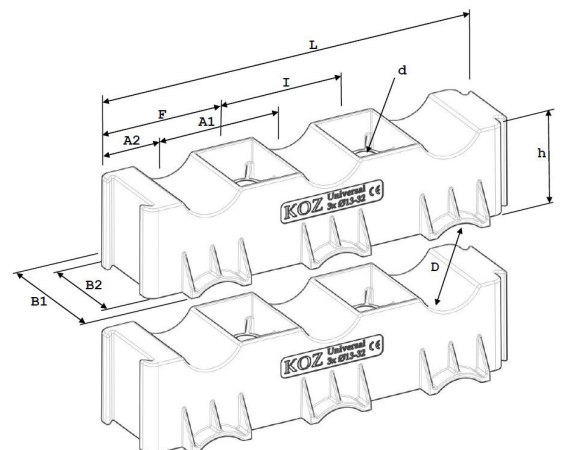

Dimensions in millimeters

Type	DØ	L	I	E	A1	A2	B1	B2	dØ	h	Strength (N)
KOZ UNI 3x 13-32	13-32	186,5	60,5	62,75	60,5	32,25	61	45	10,5	43	26.680

No rights may be derived from the indicated sizes, as the products are subject to ongoing development. KOZ Products BV therefore reserves the right to implement these changes without notice. For the most up-to-date information, visit our website.