


SPECIFICATION KOZ TYPE B-TOOL L

Application:	The KOZ B-tool L is the tool to assemble KOZ cable clamps and blocks on a straight or round pole, without damaging them by e.g. drilling or sawing. The KOZ B-tool L can also be used to install other products on straight or round poles.
Range:	B-tool L is suitable for: KOZ ST 75-100, 100-130, 120-160 KOZ STC 72-100, 100-130, 120-160 KOZ TRI eco 67-82 KOZ TRI 25-40, 38-53, 53-66, 67-82, 82-98
Material:	Black polyamide (PA66), fibreglass-reinforced, virgin material.
Fire resistance:	UL94 V-0 and classification standard EN 45545-2: 2020 – Railway applications. Requirement set R22,R23 / Hazard level HL1,HL2.
Temperature:	Permanent application from -80°C to +120°C. Short-term heating of up to +220°C.
Advantages:	Resistant to oils, greases, frost, heat, UV, ozone, salt water, salts, acids and aggressive chemicals. Non-oxidizing, non-corrosive, non-magnetic and non-conductive. Halogen-free and no sharp edges. Lifetime warranty, easy assembly and available worldwide.
Extra possibilities:	B-tools can be assembled by using a steel tie (“Bandit band”). You can turn the B-tool inside or outside, depending on the outer diameter of the cable.

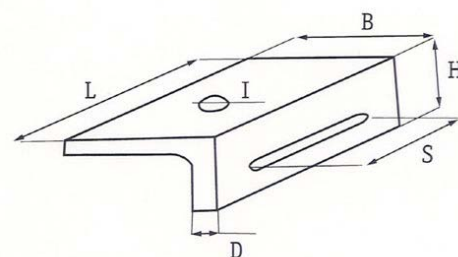

DIMENSIONS IN MILLIMETERS

Type	L	B	I	D	S	H
KOZ B-tool L	80	42	14,5	6	40-2	34